




ONE OF US!

RIDE REGINA, BE ONE OF US.




PERFORMANCE IN MOTION

ROAD




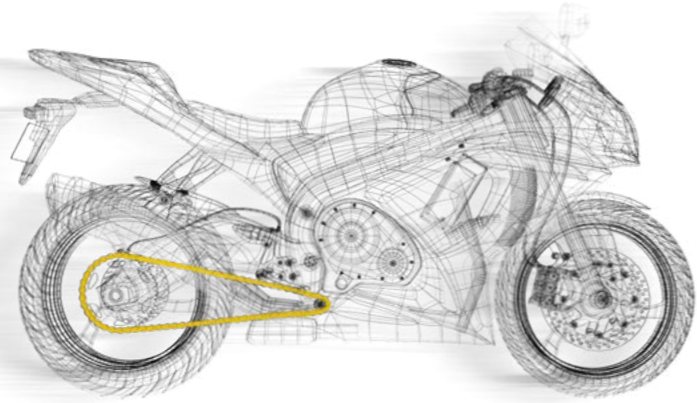


Product Range


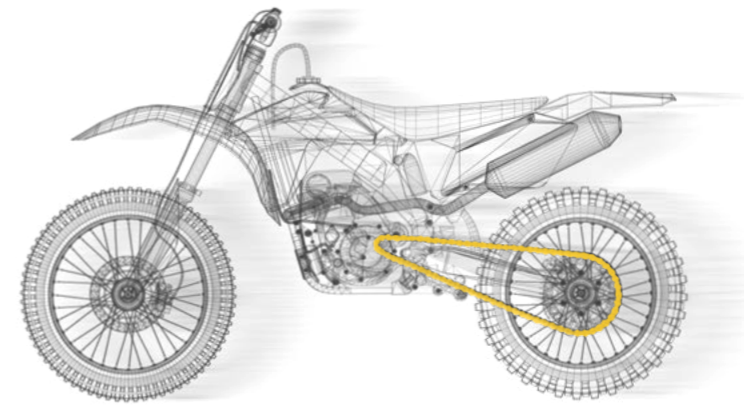


OFF-ROAD



PROFESSIONAL Your chain. Any time.

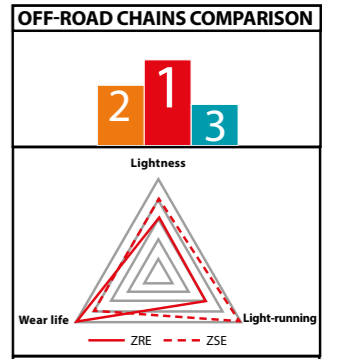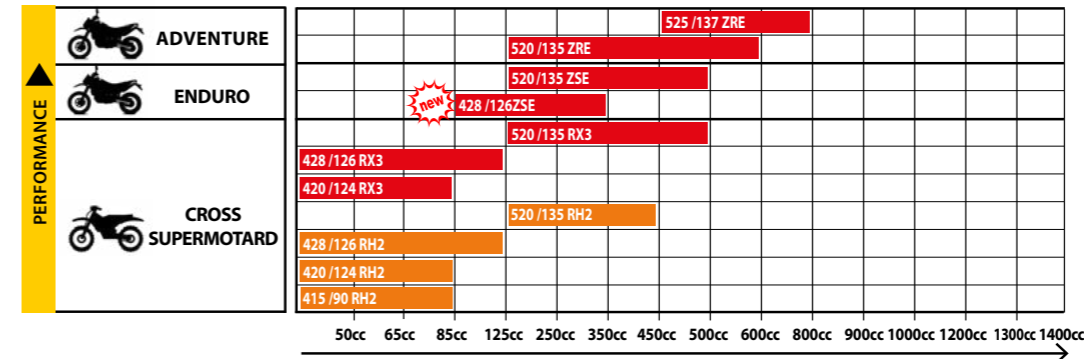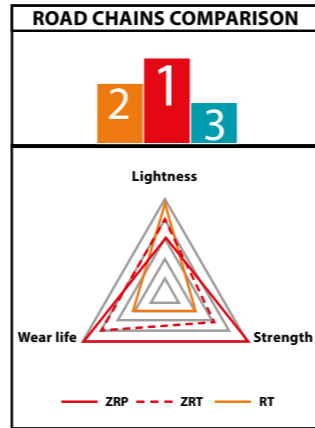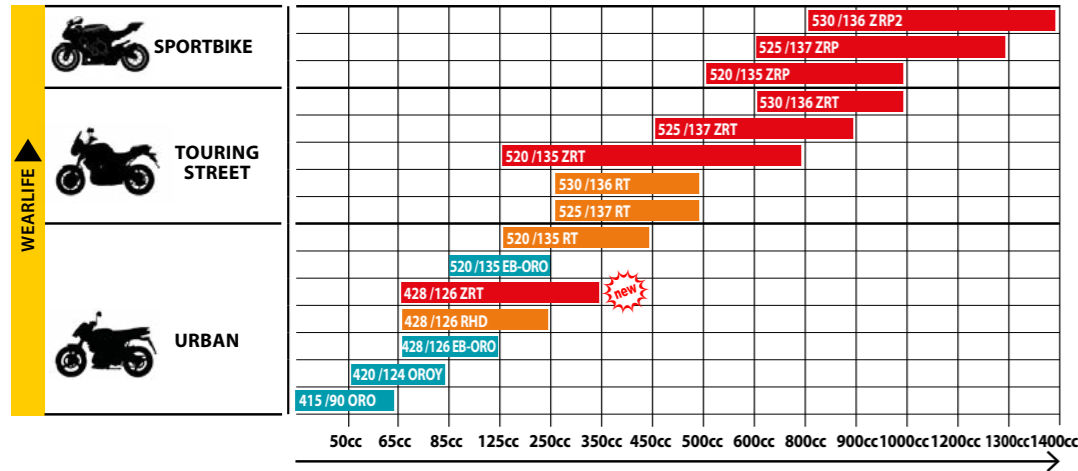


REGINA EXTRA The Chain of Champions.

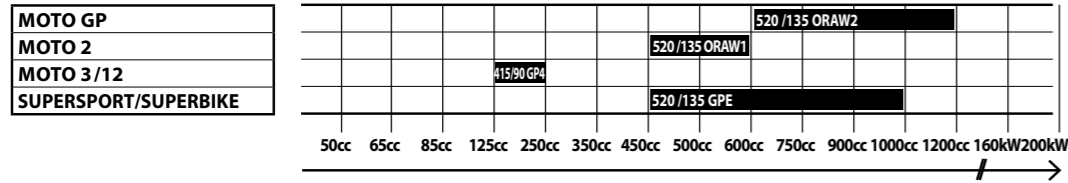

REGINA EXTRA The Chain of Champions.




Black Dual

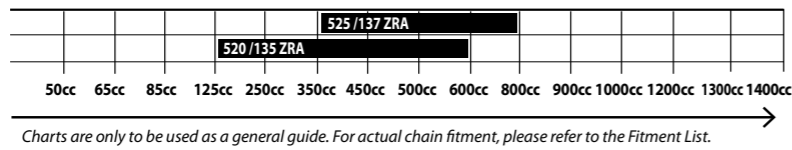

Charts are only to be used as a general guide. For actual chain fitment, please refer to the Fitment List.

Specialties

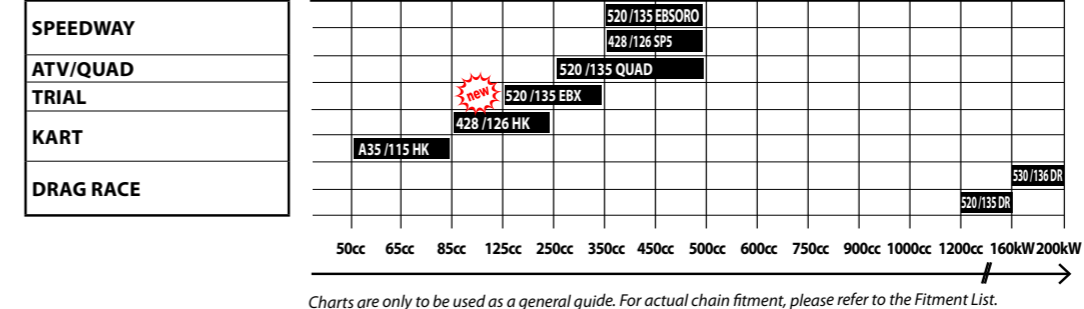

Charts are only to be used as a general guide. For actual chain fitment, please refer to the Fitment List.

Specifications

Category	Chain		Pitch	Inner Width	Roller D.	Plate Thickness		Pin Length	Weight 100 Links	Average Tensile Strength	Solid Bushing	Seal	Color	Connecting Links
	Int. Ref	Regina Ref	mm	mm	mm	outer mm	inner mm	max mm	Kg	N				Included
SPORTBIKE	530	136ZRP2	15,875	9,53	10,23	2,4	2,6	25,4	2,27	43.000	●	ZR	G/B	19+44
	525	137ZRP	15,875	7,95	10,23	2,2	2,4	23,0	2,05	41.000	●	ZR	G/B	19+44
	520	135ZRP	15,875	6,35	10,23	2,2	2,2	21,1	1,76	36.000	●	ZR	G/B	19+44
TOURING STREET	530	136ZRT	15,875	9,53	10,23	2,4	2,4	25,4	2,22	40.800	●	ZR	G/B	19+44
	525	137ZRT	15,875	7,95	10,23	2,2	2,2	23,0	1,86	35.800	●	ZR	G/B	19+44
	520	135ZRT	15,875	6,35	10,23	2,0	2,0	20,5	1,62	34.800	●	ZR	G/B	19+44
	530	136RT	15,875	9,53	10,23	2,0	2,0	21,3	1,76	34.500	●	-	G/B	19+26
	525	137RT	15,875	7,95	10,23	2,0	2,0	19,5	1,63	34.000	●	-	G/B	19+26
	520	135RT	15,875	6,35	10,23	2,0	2,0	18,4	1,57	33.200	●	-	G/B	26
URBAN	520	135EB-ORO	15,875	6,35	10,16	1,8	1,8	17,3	1,37	28.500	●	-	G/B	26
	428	126ZRT	12,70	7,75	8,51	1,8	1,8	20,7	1,08	22.300	●	ZS	G/B	42
	428	126RHD	12,70	7,75	8,51	1,8	2,0	18,9	1,05	23.500	●	-	G/B	26
	428	126EB-ORO	12,70	7,75	8,51	1,4	1,6	17,0	0,91	21.000	●	-	G/B	26
	420	124OROY	12,70	6,35	7,75	1,6	1,8	16,1	0,72	17.500	●	-	G/B	26
415	90ORO	12,70	4,77	7,75	1,6	1,8	14,5	0,67	17.000	●	-	G/B	26	
ROAD RACING	520	135ORAW2	15,875	6,35	10,23	2,0	2,2	19,2	1,65	36.000	●	OR	B/B	19
	520	135ORAW1	15,875	6,35	10,23	2,0	2,0	18,6	1,59	35.500	●	OR	B/B	19
	415	90GP4	12,70	4,77	7,75	1,6	1,6	14,7	0,76	21.000	●	-	G/B	19+26
	520	135GPE	15,875	6,35	10,23	2,0	2,2	20,7	1,70	36.000	●	ZR	G/B	19+44
BLACK DUAL	525	137ZRA	15,875	7,95	10,23	2,2	2,2	23,0	1,79	34.800	●	ZR	B/B	19+44
	520	135ZRA	15,875	6,35	10,23	2,0	2,0	20,5	1,59	33.800	●	ZR	B/B	19+42+44

G/B = Gold/Black B/B = Black/Black



Category	Chain		Pitch	Inner Width	Roller D.	Plate Thickness		Pin Length	Weight 100 Links	Average Tensile Strength	Solid Bushing	Shaped Bushing	Seal	Color	Connecting Links
	Int. Ref	Regina Ref	mm	mm	mm	outer mm	inner mm	max mm	Kg	N					Included
ADVENTURE	525	137ZRE	15,875	7,95	10,23	2,2	2,2	23,0	1,95	36.000	●	-	ZR	G/B	19+44
	520	135ZRE	15,875	6,35	10,23	2,0	2,0	20,5	1,68	35.000	●	-	ZR	G/B	19+42+44
ENDURO	520	135ZSE	15,875	6,35	10,23	2,0	2,0	18,6	1,52	33.800	●	-	ZS	G/B	19+42+44
	428	126ZSE	12,70	7,75	8,51	1,8	1,8	20,7	1,08	22.000	●	-	ZS	G/B	42
CROSS SUPERM.	520	135RX3	15,875	6,35	10,16	2,0	2,0	18,1	1,56	34.000	●	-	-	G/B	26
	428	126RX3	12,70	7,75	8,51	1,8	1,8	18,8	1,03	23.000	●	-	-	G/B	26
	420	124RX3	12,70	6,35	7,75	1,6	1,6	16,3	0,82	21.000	●	-	-	G/B	26
	520	135RH2	15,875	6,35	10,23	2,0	2,0	18,4	1,54	33.400	●	-	-	G/B	26
	428	126RH2	12,70	7,75	8,51	1,8	2,0	18,9	1,00	23.000	●	-	-	G/B	26
	420	124RH2	12,70	6,35	7,75	1,6	1,6	16,3	0,82	20.000	●	-	-	G/B	26
415	90RH2	12,70	4,77	7,75	1,6	1,6	14,7	0,76	19.500	●	-	-	G/B	26	
OFF ROAD RACING	520	135GPXV	15,875	6,35	10,16	2,0	2,0	18,1	1,56	35.000	●	-	-	G/B	19+26
	520	135EBX	15,875	6,35	10,16	1,6	1,6	16,6	1,27	27.000	●	-	-	G/B	26
SPEEDWAY	520	135EBSORO	15,875	6,35	10,16	1,8	1,8	17,3	1,41	29.000	●	-	-	G/B	26
	428	126SP5	12,70	7,75	8,51	1,8	2,0	18,9	1,05	22.500	●	-	-	G/B	(19)
QUAD	520	135QUAD	15,875	6,35	10,23	2,2	2,2	21,1	1,76	36.500	●	-	ZR	G/B	42
KART	428	126HK	12,70	7,75	8,51	1,8	2,0	18,9	1,05						

